



CROSSOVER

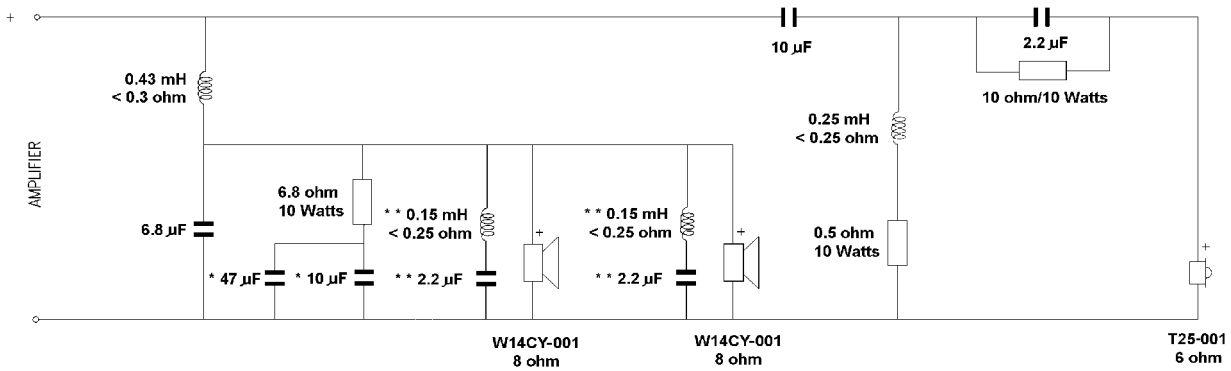

- All resistors are 10 watt wirewound 5% tolerance.
- All capacitors are polypropylene film 100 v unless otherwise noted.
- All coils are air core type.

* = NP electrolytic, 100v

** = These components are located directly at the speaker terminals.

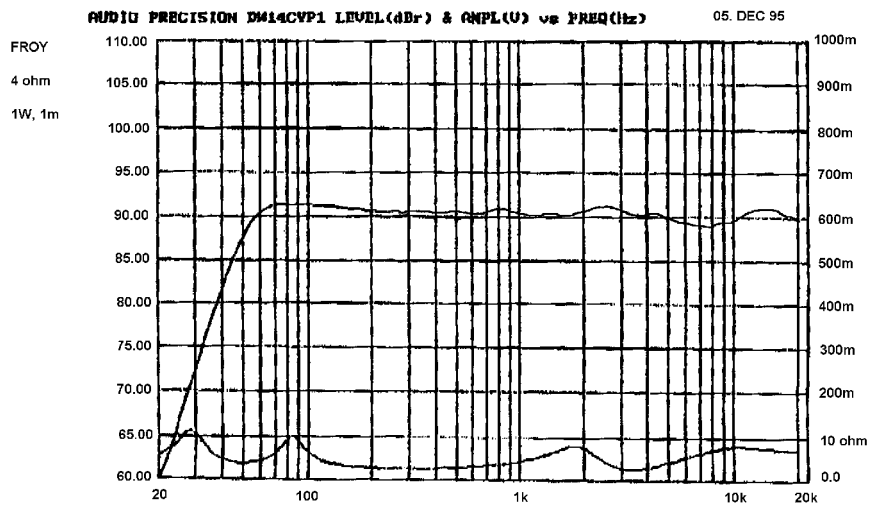

TECHNICAL DATA

IMPEDANCE 4 Ohms
 SHORT TERM MAX. POWER * 400 W
 LONG TERM MAX. POWER * 140 W
 CROSSOVER FREQUENCY 2500 Hz
 FREQUENCY RANGE 50-25000 Hz

SENSITIVITY 90.0 dB SPL
 OPERATING POWER 4.0 W
 RECOMMENDED AMPLIFIER 50-400 W
 DIMENSIONS 171x432x241 mm
 CABINET VOLUME 11 Litres

* = IEC 268-5

SEAS reserves the right to change technical data.

YOUR *s e a s* DEALER

